

3
YEARS
WARRANTY



DC-8600

Next generation
Re-transfer printing



HIGHLIGHTS AT A GLANCE:

- High resolution printing with 600 dpi
- High productivity due to high speed printing
- Over-the-Edge full card printing
- High capacity card feeder
- Prepared for encoders


DC-8600

The DC-8600 is the next generation re-transfer printer from DASCOCM. Available in two models the printer can hold up two different cards with a maximum capacity of 450 cards. With a print speed of up to 180 cards/hour and high capacity ribbons for 1.000 images the printer is not scared of large print jobs.

Both models have a USB and an Ethernet interface as standard and can be upgraded by a WiFi interface. The administration can be done via a browser through the DASCOCM WebPanel.

TECHNICAL DATA

Print Method	Colour dye sublimation re-transfer technology
Resolution	600 dpi
Print Capability	Single Side, Double Side, Over-the-Edge, photo quality image colour
Print Speed	Single Side: 20 sec. Double Side: 45 sec.
Interfaces	USB (2.0), Ethernet (10/100) <i>Optional:</i> WiFi
Card Thickness	0,5 - 1,1 mm (20 - 50 mil)
Security Features	RFID ribbon, card feeder lock, custom watermarks (BMP)
Card Loading	<i>Standard:</i> Card feeder for 250 cards (0,76 mm thickness) <i>Double Bin:</i> Card feeder for 250 cards and 2nd card hopper for 200 cards Manual feed: single card
Card Types	PVC, PET, PET-G, PC 85,6 x 53,98 mm (ISO ID-1/CR-80 size)
Consumables	Ribbon YMCK (500 or 1.000 Images), Ribbon YMCKH (400 or 800 Images), Ribbon YMCKK (400 or 800 Images), Ribbon YMCKI (400 or 800 Images), Ribbon YMCKSI (350 or 700 Images), Transfer Film YMCK (500 or 1.000 Images) Ribbon K (500 or 1.000 Images), Transfer Film K (500 or 1.000 Images)
Cleaning Set	Cleaning Card Cleaning Roller
Physical Weight	<i>Standard:</i> 13,3 kg <i>Double Bin:</i> 15 kg
Physical Size	<i>Standard:</i> 248 x 339 x 408 mm (W x D x H) <i>Double Bin:</i> 248 x 466 x 408 mm (W x D x H)
Power Voltage	Auto wide ranging, 100 - 240 V AC - 50/60 Hz
Environment	Printing: +15° to +30° C Temperature; 35 - 95% Humidity Storage: +5° C to +45° C Temperature; 35 - 95% Humidity
Driver	Windows 8/8.1/10/11 and Server 2012/2016/2019/2022, macOS
Optional Encoder	Encoder prepared
Warranty	For more details please contact your local dealer

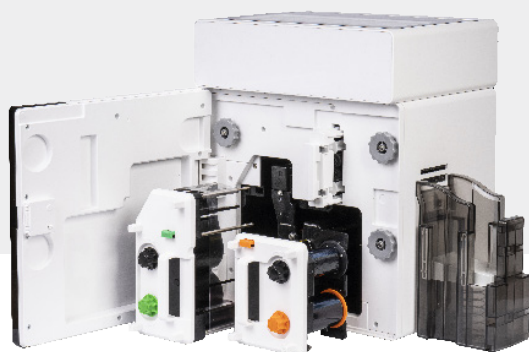

Standard model



Double bin model

DASCOCM GB Ltd

Hart House, Priestley Road
Basingstoke | Hampshire RG24 9PU | ENGLAND
Tel.: +44 1256 355 130 | Fax: +44 1256 481 400
info.gb@dascom-com | www.dascom.co.uk

DASCOCM Europe GmbH

Hewweg 3 | 89079 Ulm | GERMANY
Tel.: +49 731 2075-0 | Fax: +49 731 2075-100
info@dascom.com | www.dascomeurope.de

DASCOCM (Holdings) LTD.

R. 1811-1816A | Nan Fung Centre
264-298 Castle Peak Road | Tuen Wan, N. T. | Hong Kong
Tel.: +852 2498 1507 | Fax: +852 2413 6047



KT-200

Entrance to
kiosk card printing



HIGHLIGHTS AT A GLANCE:

- High resolution printing with 300 x 1200 dpi
- Edge-to-Edge printing
- Specific design for kiosk application
- Full metal housing
- Different versions (single or dual side)
- Optional back-cleaning module
- Optional cassette for 200 cards input